



- **Système de distribution et de drainage abordable pour petits filtres avec embout supérieur à 115 mm**
- **Bras inclinés pour filtres à fond bombé, pour raccordement par le haut**
- Inexpensive distribution and drain system for small filters with opening larger than 115mm
- Angled arms for filters with rounded heads, with upper connection

Matière
Material







Modèle Model	Montage bras - SF/SFC - Arm assembly			Ø C Ø Coll. assemblé Assembled coll. Ø mm
	Fente bras Arm slot width	Nbre de têtes No. of heads	Lt - Longueur bras Lt - Arm length mm	
CSTo6	0,25 0,50	2	91	281
		3	128	351
		4	164	418
		5	201	488
		6	237	555
		7	274	625
		8	310	693
		9	347	762
		10	383	830
		11	420	899
		12	456	967
		13	493	1037
		14	529	1104
		15	566	1174
		16	602	1241
		...	602 + Lc = 36.5	1241 + 68,5

Collecteur avec certification ACS/MOCA produit en PP naturel (Blanc) - Collecteur en PPFV30 % produit naturel (Ivoire) - Collecteur en PVDF produit naturel (Blanc)
Collector with ACS/MOCA certification, made of natural PP (white) - Collector in PPGF30, natural colour (ivory) - Collector in natural PVDF (white)

COMMANDE - ORDER		
Modèle Model	Filetage Thread	Matière Material
CSTO6	2"G	PP

Fiche technique
à la page 146
Datasheet
page 146

Bras filtrants SF
SF filter arms

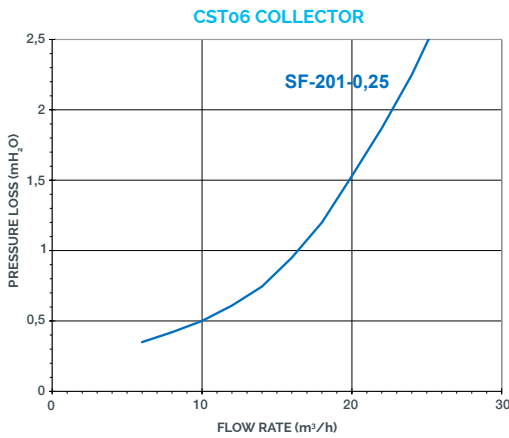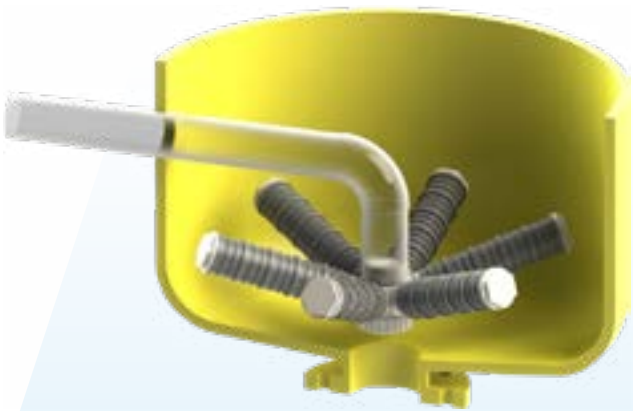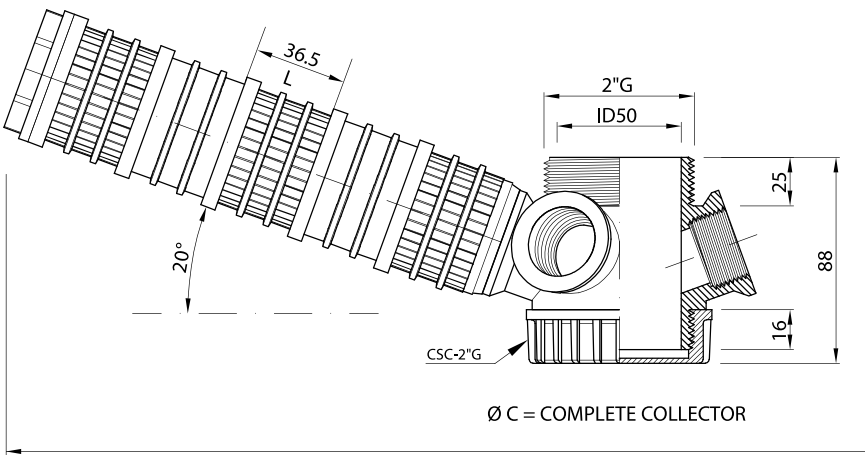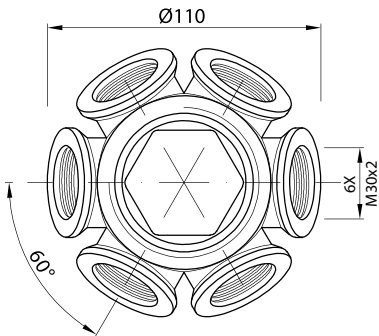

REMARQUES
Sur demande, il est possible de fournir la courbe de perte de charge pour toute la gamme de buses ILMAP.
The Pressure Loss Curve for the ILMAP nozzle range can be supplied on request.