

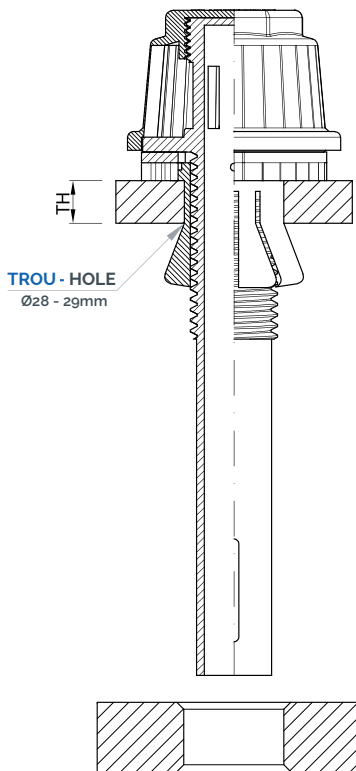



TS1 - 5/10 mm



TS3 - 15/20 mm



TS2 - 10/15 mm



TS4 - 20/24 mm

- Utilisée pour l'installation des buselures de filtration quand le plancher n'est pas accessible par le dessous
- Suitable for filters where access to the underside of the nozzle plate is not possible

Matière
Material

PP

PPHT

PVDF

Modèle Model	TS PP Épaisseur plancher Plate thickness	TS PVDF Épaisseur plancher Plate thickness	Orifice plancher ø Plate hole ø	Filetage Thread	Couleur Colour
TS1	5 - 10 mm		28 - 28,5 mm	15/16"W M24	
TS2	10 - 15 mm	5 - 10 mm			
TS3	15 - 20 mm	10 - 15 mm			
TS4	20 - 24 mm	15 - 20 mm			

Pour les applications avec température (PVDF), nous suggérons de vérifier la fixation. Si possible, il est préférable d'installer des buses avec écrou de fixation - Accessoires munis de certification ACS/MOCA produit PP naturel (Blanc) - Accessoires en PVDF produit naturel (Blanc)

For high-temperature applications (PVDF), we advise verifying the fit and material compatibility; if possible, we recommend installing the nozzles with fixing nuts - Accessories with ACS/MOCA certification, made of natural PP (white) - Accessories in natural PVDF (white)

COMMANDE - ORDER		
Modèle Model	Filetage Thread	Matière Material
TS1	15/16"W	PP



Les orifices sur les planchers devront être chanfreinés pour éviter d'endommager l'embase expansive.

The plate holes must be chamfered to prevent damage to the bolt during expansion.

